Medical infrared thermometer

Handheld non-contact infrared sensor for temperature measurement



- Stable and reliable
- Temperature measurement in seconds
- •Large screen backlight
- Smart power saving



Six Function

• 1. One second speed test

Press the gun key swotch, the result is 1S.

3. Dual-mode temperature

Temperature / object temperature dual mode switching.

5. Infrared sensor

Using non-read accuracy measurement.

2. Accurate measurement

Remote infrared accuracy measurement.

• 4、LED Display

Easy-to-read LCD display.

6. Smart alert

If the temperature is too high, it will emit a dip alarm.

Infrared one second speed test

Non-contact rapid temperature measurement keeps your baby from crying Fast radiation-free while avoiding cross infection



Infrared sensor probe

Accurately sense changes at 0.1 $^{\circ}$ C

By receiving infrared energy from the human body Sensing baby's temperature change at 0.1 °C



SET Key to switch modes

Non-contact rapid temperature measurement keeps your baby from crying Fast radiation-free while avoiding cross infection



2 temperature measurement modes

Not only taking body temperature, It can also measure the temperature of objects, Mode switching, Comprehensive care for the health of the whole family

Intuitive large screen tri-color backlight

Whether you have a high fever or not, Lets you grasp health problems more conveniently and quickly







NORMAL

HIGH

FEVER


Bright green backlight Buzzer sounds at the s ame time

Bright orange backlight Buzzer sounds at the same 32 °C ~ 37.5 °C time 37.5 °C ~ 39 °C

Bright red backlight Three beeps 39 ℃ ~ 43 ℃

32 sets of memory values

Intelligently grasp the change of body temperature

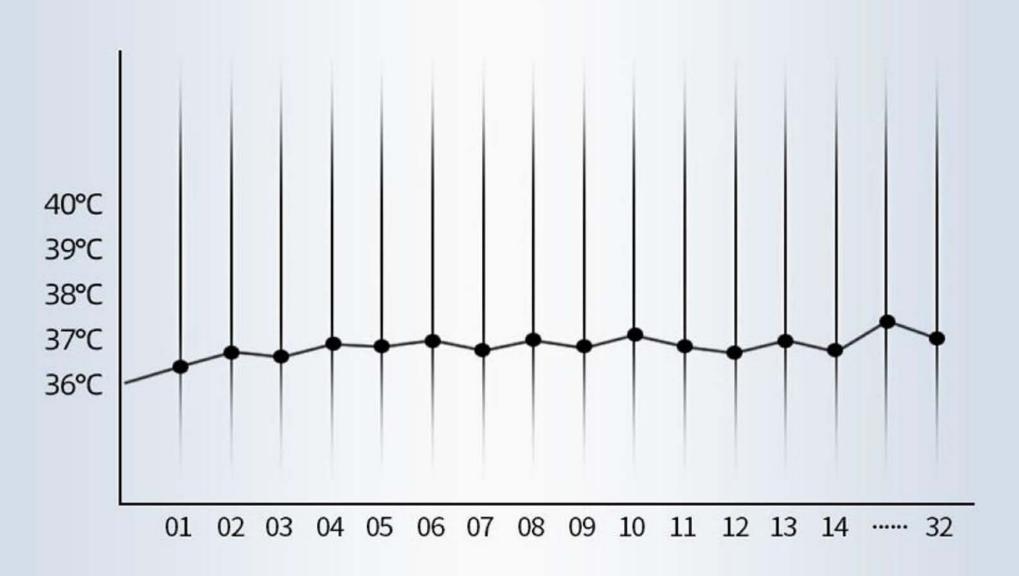

Construction explanation

How to use a product, you need to start from the appearance of the structure





In addition to measuring body temperature

Can also measure surface

Can also measure surface temperature



Parameter Introduction





MODEL	YHKY-2000
HOW TO USE	Contactless
USE DISTANCE	3cm-5cm
USE RANGE	32°C-43°C (89.6°F-109.4°F)
ALLOWABLE ERROR	35℃-42℃ ±0.2℃ 42.1℃-43℃ ±0.3℃
DISPLAY RESOLUTION	0.1℃
USE ENVIRONMENT	10°C-40°C (50°F-104°F) humidity≤85%
STORAGE ENVIRONMENT	0°C-50°C (32°F-122°F) humidity≤85%
POWER SUPPLY	DC3V(2 AAA batteries) ↑
POWER DISPLAY	Low battery alert
BACKLIGHT	Highlight backlight
DISPLAY UNIT	°C /°F
AUTO CLOSE	15 seconds
SIZE	138mm×84mm×40mm
WEIGHT	130G

Pack+Weight



Pack

1pcs in one box ,
carton size : 540*360*320mm ,
50boxes ,50pcs in one carton

Weight

one carton: N.W 7.25KG, G.W 7.5KG